

Technical Data Sheet

3mm Flat Lens LED: SLR3362

■ Features

- . Dominant Wavelength 660nm
- . Super brightness
- . Pb free
- . The product itself will remain within RoHS compliant version.




■ Descriptions

The SLR3362 is specially designed for applications requiring super brightness, molded in a water clear plastic package.

■ Applications

- . Decorative and Entertainment Lighting
- . Fiber Amplifier
- . Agriculture Lighting

■ Package Dimensions

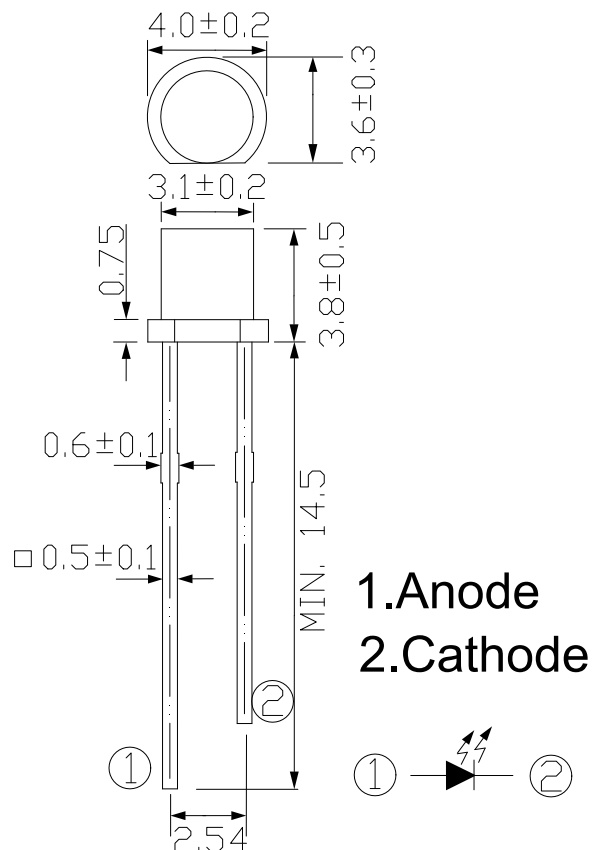

Note: 1. All dimensions are in millimeters

2. Tolerances unless dimensions ± 0.25 mm

■ **Absolute Maximum Ratings (Ta=25°C)**


Parameter	Symbol	Rating	Units
Continuous Forward Current	I _F	70	mA
Peak Forward Current (Duty 1/200 @ 0.5KHZ)	I _{PF}	100	mA
Reverse Voltage	V _R	10	V
Power Dissipation	P _d	150	mW
Lead Soldering Temperature	T _{sol}	280	°C
Operating Temperature	T _{opr}	-40 ~ +85	°C
Storage Temperature	T _{stg}	-40 ~ +100	°C

■ **Electro-Optical Characteristics (Ta=25°C)**


Parameter	Symbol	Condition	Min.	Typ.	Max.	Units
Luminous Intensity	I _V	I _F =20mA	150	200	--	mcd
Viewing Angle	2θ _{1/2}	I _F =20mA	--	120	--	deg
Dominant Wavelength	λ _d	I _F =20mA	--	660	--	nm
Spectrum Radiation Bandwidth	Δλ	I _F =20mA	--	20	--	nm
Forward Voltage	V _F	I _F =20mA	1.8	1.9	2.4	V
Reverse Current	I _R	V _R =5V	--	--	10	μA

■ **Typical Electro-Optical Characteristics Curves**


Relative Intensity vs. Wavelength (Ta=25°C)

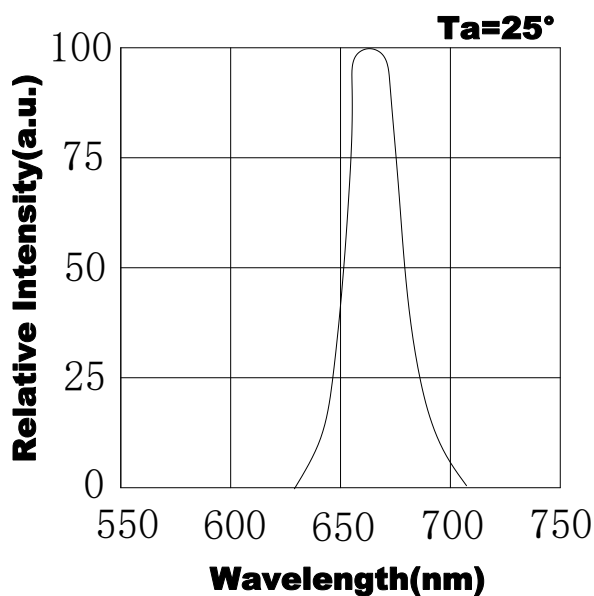


Directivity (Ta=25°C)

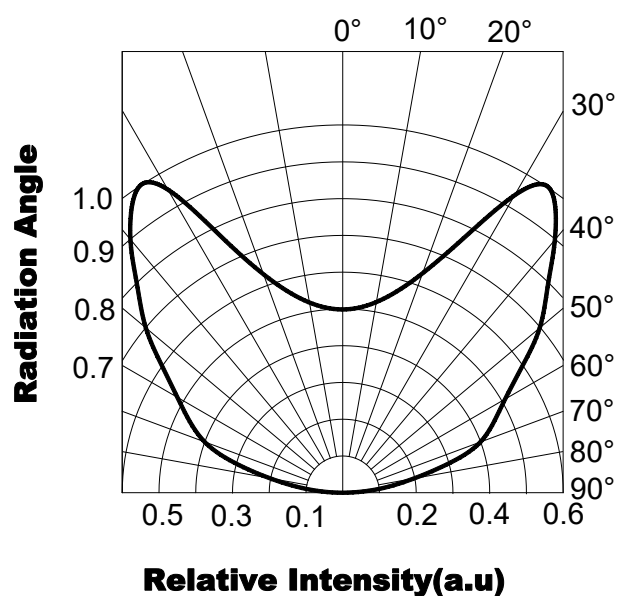


Forward Current vs. Forward Voltage (Ta=25°C)

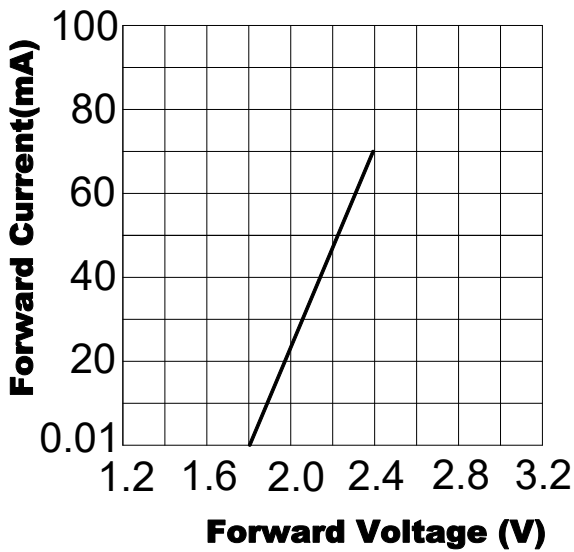


Relative Intensity vs. Forward Current (Ta=25°C)

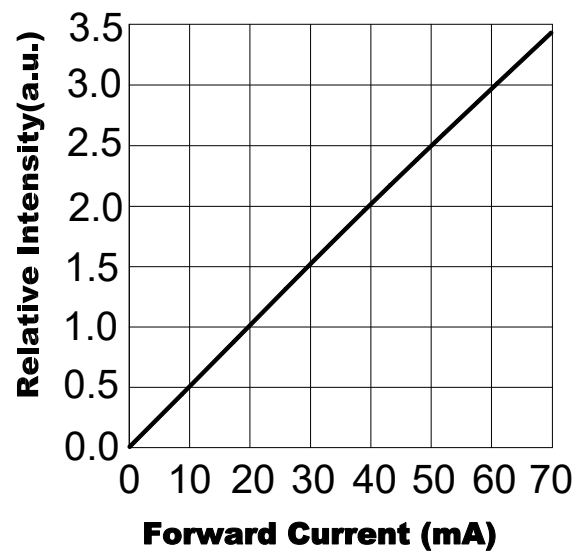

Relative Intensity vs. Ambient Temp.

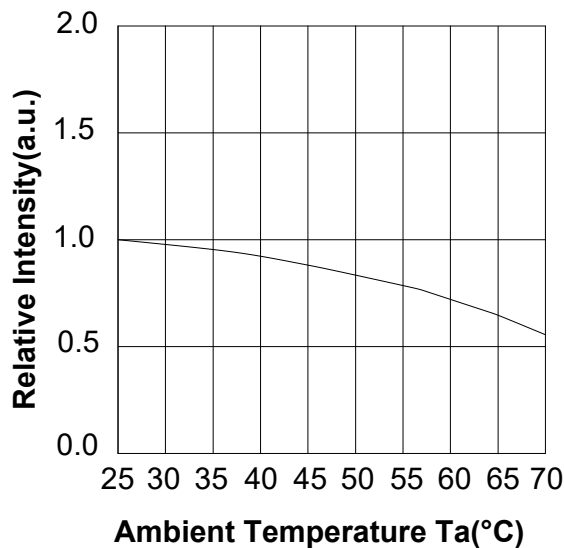

Maximum Forward Current vs. Ambient Temp.

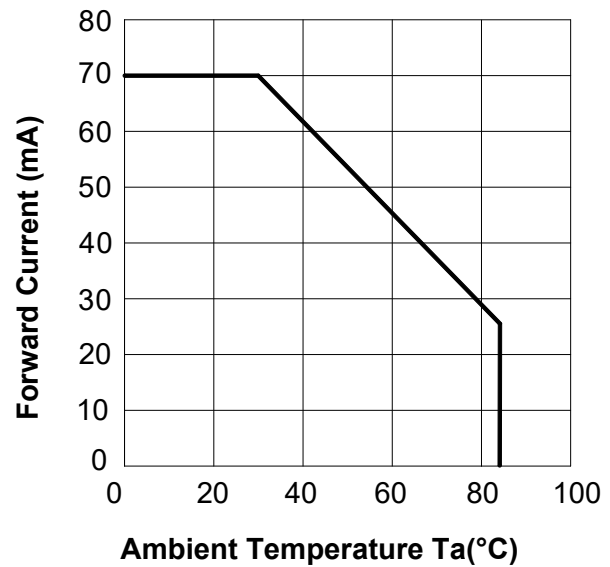

■ **Packing Quantity Specification**

1. 1000PCS/1Bag

■ **Notes**

1. Above specification may be changed without notice. SHUGUAN will reserve authority on material change for above specification.
2. When using this product, please observe the absolute maximum ratings and the instructions for using outlined in these specification sheets. SHUGUAN assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
3. These specification sheets include materials protected under copyright of SHUGUAN corporation. Please don't reproduce or cause anyone to reproduce them without SHUGUAN's consent.